


Regent Dinflow

DIMENSIONS

BARE SHAFT DIMENSIONS

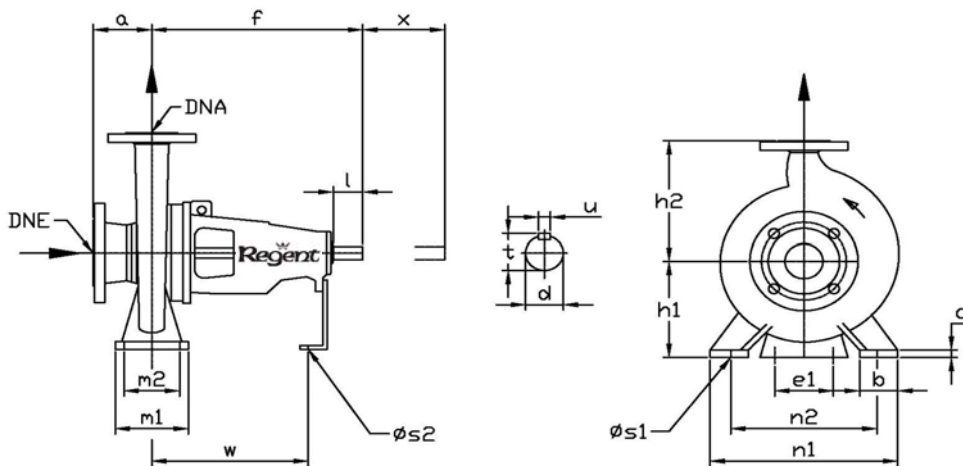

PUMP SIZE	SHAFT UNIT	DNE	DNA	a	f	h1	h2	b	c	e1	m1	m2	n1	n2	s1	s2	w	d	l	t	u	x	WGT KG													
32-130	25	50	32	80	360	112	140	50	14	110	100	70	190	140	14	14	267	24	50	27	8	140	28													
32-160	25					132	160						240	190									36													
32-200	25					160	180						240	190									43													
32-260	25	65	40	100	360	180	225	65	14	110	125	95	320	250	14	14	267	24	50	27	8	140	63													
40-130	25			80		112	140	210					160	31																						
40-160	25			132		160	240	190					37																							
40-200	25	160	180	265	212	46																														
40-260	25	180	200	320	250	63																														
40-320	35	125	470	200	225	65	14	110	125	95	345	280	342	32	80	35	10	96																		
50-130	25	65	50	100	360	132	160	50	14	110	100	70	240	190	14	14	267	24	50	27	8	140	34													
50-160	25					160	180						265	212									38													
50-200	25					180	200						320	250									48													
50-260	25	125	470	225	280	65	16	110	125	95	345	280	342	32	80	35	10	101																		
50-320	35	180	225	65	16	110	125	95	345	280	342	32	80	35	10	101																				
65-130	25	80	65	100	360	160	180	65	14	110	125	95	280	212	14	14	267	24	50	27	8	140	40													
65-160	25					180	225						320	250									44													
65-200	25					200	250						360	280									54													
65-260	25	470	225	280	80	16	110	160	120	400	315	18	342	32	80	35	10	110																		
65-320	35	125	470	225	280	80	16	110	160	120	400	315	18	342	32	80	35	10	110																	
80-160	25	100	80	125	360	180	225	65	14	110	125	95	320	250	14	14	267	24	50	27	8	140	55													
80-200	35					470	200						280	80									16	110	160	120	400	315	18	342	32	80	35	10	140	72
80-260	35					250	315						80	16									110	160	120	400	315	18	342	32	80	35	10	140	92	
80-320	35	520	280	355	85	110	160	120	400	315	18	342	32	80	35	10	140	120																		
80-400	45	125	470	200	250	80	16	110	160	120	400	315	18	342	32	80	35	10	140	162																
F100-160	35	125	100	125	470	200	250	80	16	110	160	120	400	315	18	14	342	32	80	35	10	140	80													
100-200	35			470	225	280	80	16	110	160	120	400	315	18	342	32	80	35	10	140	87															
100-260	35			250	315	80	16	110	160	120	400	315	18	342	32	80	35	10	140	110																
100-320	35	530	280	355	100	18	110	200	150	500	400	23	370	42	110	45	12	177																		
100-400	45	125	470	200	250	80	16	110	160	120	400	315	18	342	32	80	35	10	140	134																
125-200	35	150	125	140	470	250	315	80	16	110	160	120	400	315	18	14	342	32	80	35	10	140	112													
125-260	35					530	280						355	100									18	110	200	150	500	400	23	370	42	110	45	12	190	
125-320	45					160	670						375	500									120	25	140	550	450	511	55	59	16	180	225			
125-400	45	495	280	400	20	110	200	150	550	450	342	32	80	35	10	154																				
125-500	60	530	280	400	100	18	110	200	150	550	450	23	370	42	110	45	12	190																		
150-200	35/1	200	150	160	530	315	450	100	18	110	200	150	550	450	23	14	370	42	110	45	12	140	115													
150-260	45					180	670						375	500									120	25	140	511	55	59	16	180	225					
150-320	45					250	315						450	100									18	110	200	150	550	450	23	370	42	110	45	12	190	
150-400	45	180	670	375	500	120	25	140	511	55	59	16	180	225																						
150-500	60	210	675	400	500	160	30	140	300	240	720	600	27	511	55	59	16	180	320																	
200-260	45/1	250	200	180	575	280	400	100	25	110	200	150	500	400	22	14	435	42	110	45	12	180	207													
F200-260	45/1					553	315						450	100									20	110	220	170	600	480	28	511	55	59	16	180	206	
200-320	55					200	670						355	450									120	25	140	300	240	720	600	27	511	55	59	16	180	240
F200-320	55	180	670	315	480	100	20	110	220	170	600	480	28	504	48	110	51	14	180	254																
200-400	55	200	670	355	500	120	25	140	200	150	550	450	23	511	55	59	16	180	350																	
F200-400	55	180	670	335	480	100	20	110	220	170	600	480	28	504	48	110	51	14	180	295																
200-500	60	210	675	400	500	160	30	140	300	240	720	600	27	511	55	59	16	180	530																	
250-320	55	300	250	200	670	525	100	24	110	300	250	175	600	500	14	14	511	48	110	51	14	180	370													
F250-320	55					220	691	520				150	22	250									200	660	510	28	525	48	110	51	14	311				
250-400	60					250	670	400				500	120	25									140	300	250	710	600	23	511	55	59	16	180	457		
F250-400	55	220	682	560	150	22	250	200	660	510	28	516	48	110	51	14	390																			
250-500	75	240	875	425	545	160	30	140	300	200	720	600	27	19	19	625	70	140	75	20	180	646														
300-400	75	280	875	500	600	150	40	140	300	200	800	660	27	19	19	625	70	140	75	20	180	720														

Certified drawings are available on request, POA, contact Regent Sales office for more details.

All weights and measurements are subject to change without notice.

All weights and measurements are approximate only and should not be used for construction.

FLANGE MATING DIMENSIONS TO B.S. 4504, PN 16

DNA/DNE	32	40	50	65	80	100	125	150	200	250	300	350
D	140	150	165	185	200	220	250	285	340	405	460	520
k	100	110	125	145	160	180	210	240	295	355	410	470
d2 x No.	18 x 4	18 x 4	18 x 4	18 x 4	18 x 8	18 x 8	18 x 8	22 x 8	22 x 12	26 x 12	26 x 12	26 x 16